

PRODUCT
INFORMATION

LOW HEADROOM
MONORAIL TROLLEY


DWG. NO:

28311423

10 TON CAPACITY

DATE: 15.04.98

REVISION: 0

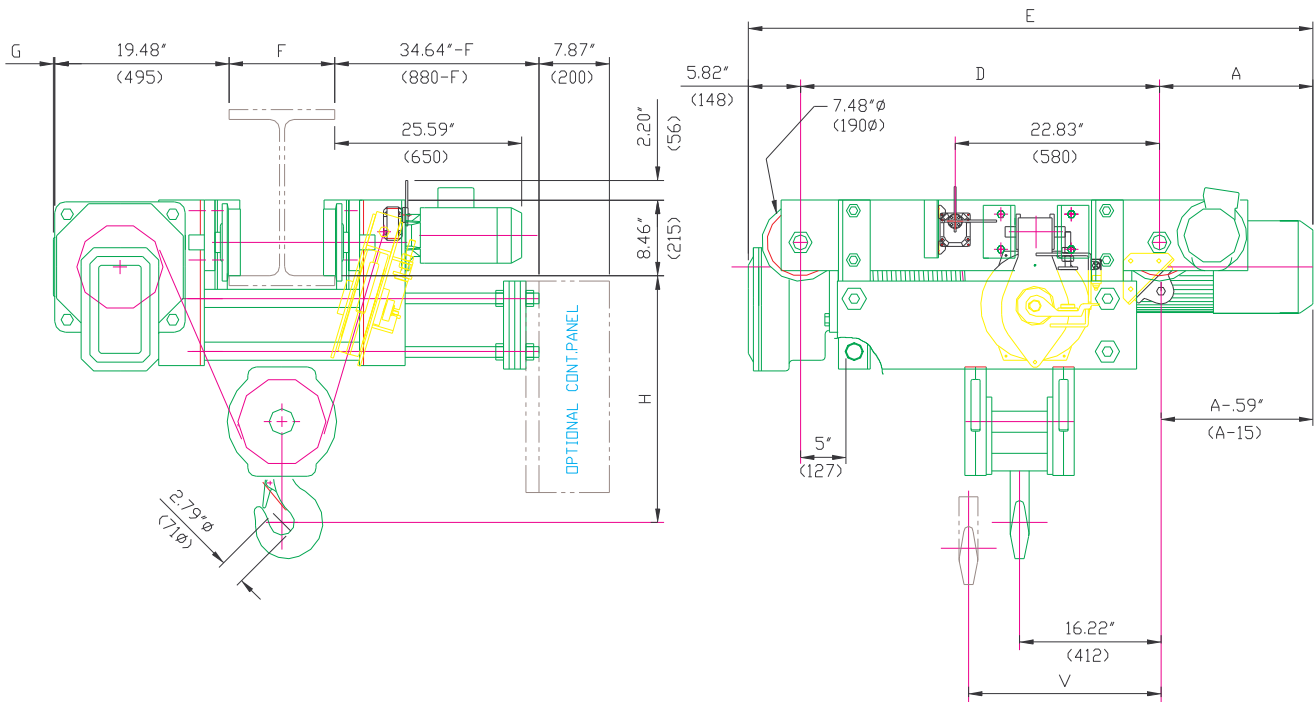

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	10 TONS (20000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	12/4 HP, 1800/600 RPM, TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	16 / 5 F.P.M. (OPT. SPEEDS AVAILABLE)	TROLLEY CLASS:	C		
TROLLEY SPEED:	80 / 20 F.P.M. (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V-3PH-60HZ	TROLLEY MOTOR:	.9 / .22 HP, 3600/900 RPM, TEFC, S3 - 60%, CLASS "F" INSULATION

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		V INCHES (mm)	D INCHES (mm)	E INCHES (mm)	A INCHES (mm)	G INCHES (mm)	WEIGHT LBS (KG)	FLANGE WIDTH "F"		HEADROOM "H"	
	METERS	FEET							mm	INCHES	mm	INCHES
2831-1423	7.7	25'-3"	21.92 (557)	40.11 (1019)	63.11 (1603)	17.16 (436)	.15 (4)	2044 (927)	≤200	≤7.87	700	27.55
2831-2423	10.6	34'-9"	24.09 (612)	48.77 (1239)	71.77 (1823)	17.16 (436)	.15 (4)	2231 (1012)	≤305	≤12.00	700	27.55
2831-3423	14.5	47'-6"	27.04 (687)	60.59 (1539)	83.58 (2123)	17.16 (436)	.15 (4)	2363 (1072)	≤406	≤15.98	775	30.51
2831-4423	20.5	67'-3"	31.49 (800)	78.30 (1989)	101.29 (2573)	17.16 (436)	.15 (4)	2705 (1227)	≤500	≤19.68	875	34.44