

PRODUCT
INFORMATION

LOW HEADROOM
MONORAIL TROLLEY


DWG. NO:

2841P1223

7 1/2 TON CAPACITY

DATE: 04.06.99

REVISION: 0

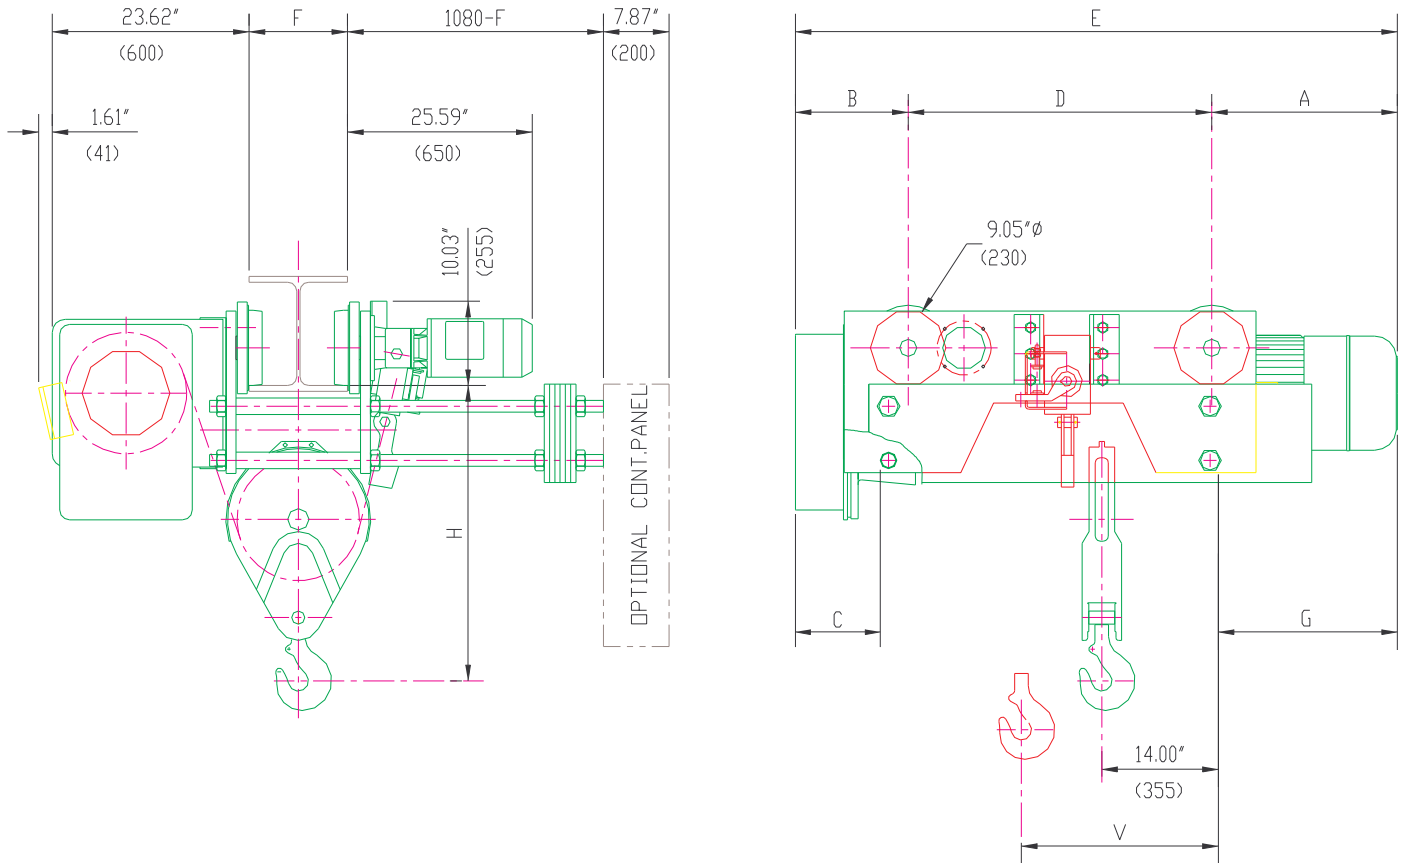

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	7 1/2 TONS (15000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	22.5/7.7 HP, 1800/600 RPM, TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	32 / 10.5 F.P.M (OPT. SPEEDS AVAILABLE)	TROLLEY CLASS:	CMAA C	TROLLEY MOTOR:	.9 / .19 HP, 3600/900 RPM, TEFC, S3 - 60%, CLASS "F" INSULATION
TROLLEY SPEED:	80 / 20 F.P.M. (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V-3PH-60HZ		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		A INCHES (mm)	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)	E INCHES (mm)	G INCHES (mm)	WEIGHT LBS (KG)	FLANGE WIDTH "F"		H INCHES (mm)	V INCHES (mm)
	METERS	FEET								mm	INCHES		
2841P-1223	15.8	51'-10"	22.28 (566)	13.54 (344)	10.20 (259)	36.42 (925)	72.24 (1835)	21.50 (546)	3113 (1415)	≤200	≤7.87	37.40 (950)	23.62 (600)
2841P-2223	24.0	78'-9"	22.20 (564)	23.70 (602)	12.48 (317)	36.42 (925)	82.32 (2091)	21.42 (544)	3443 (1565)	≤305	≤12.00	35.43 (900)	28.62 (727)
2841P-3223	38.5	126'-4"	18.94 (481)	23.70 (602)	12.48 (317)	57.36 (1457)	100.00 (2540)	21.50 (546)	3949 (1795)	≤406	≤15.98	33.46 (850)	37.48 (952)
2841P-5223	50.1	164'-5"	18.94 (481)	23.70 (602)	12.48 (317)	71.54 (1817)	114.17 (2900)	21.50 (546)	4257 (1935)	<600	<23.62	41.34 (1050)	44.56 (1132)