

PRODUCT
INFORMATION

LOW HEADROOM
MONORAIL TROLLEY


DWG. NO:

2841P1423

15 TON CAPACITY

DATE: 04.06.99

REVISION: 0

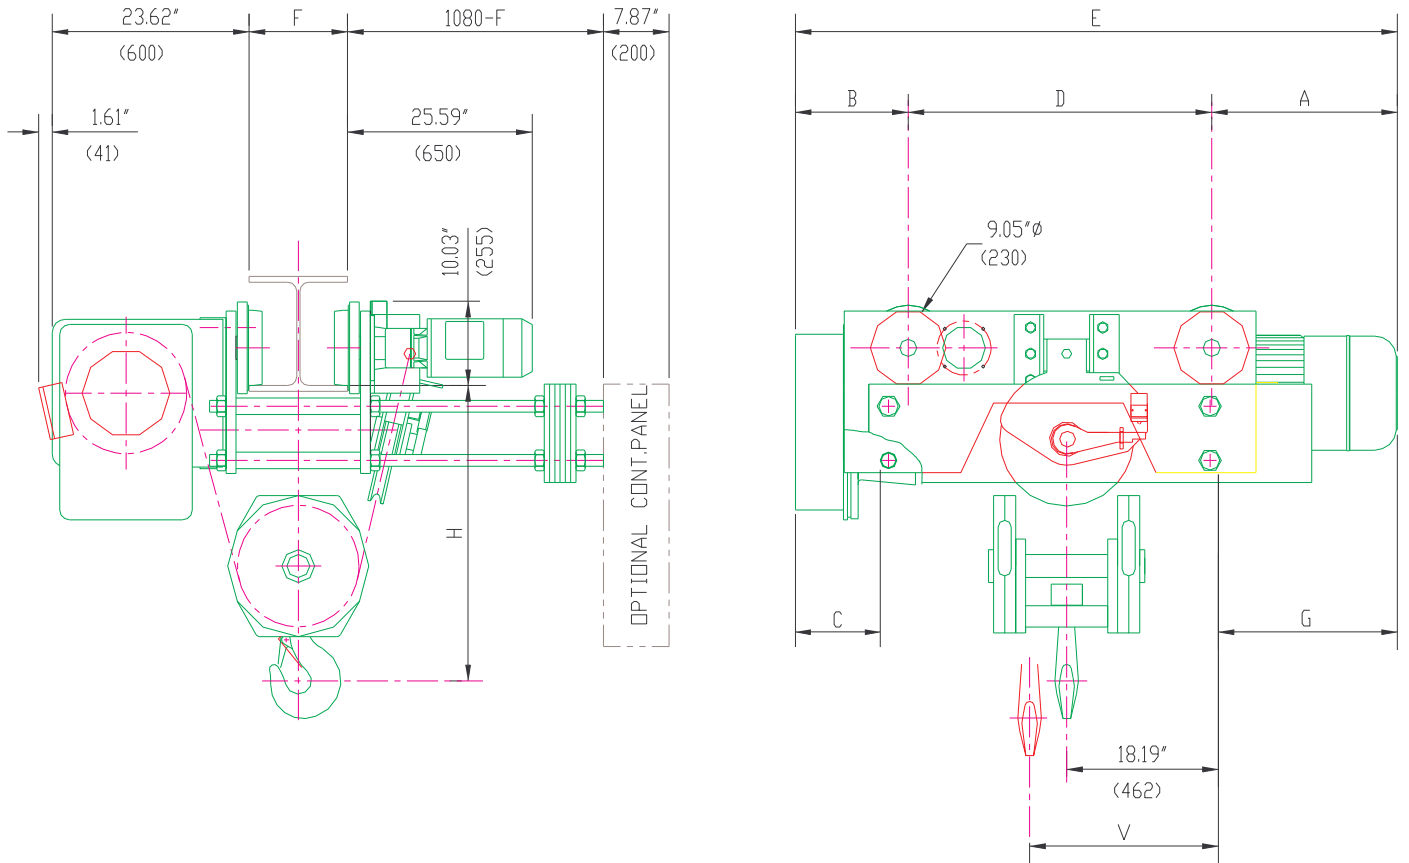

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	15 TONS (30000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	22.5/7.7 HP, 1800/600 RPM, TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	16 / 5 F.P.M. (OPT. SPEEDS AVAILABLE)	TROLLEY CLASS:	CMAA C		
TROLLEY SPEED:	80 / 20 F.P.M. (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V-3PH-60HZ	TROLLEY MOTOR:	1.2 / .3 HP, 3600/900 RPM, TEFC, S3 - 60%, CLASS "F" INSULATION

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		A INCHES (mm)	B INCHES (mm)	C INCHES (mm)	D INCHES (mm)	E INCHES (mm)	G INCHES (mm)	WEIGHT LBS (KG)	FLANGE WIDTH "F"		H INCHES (mm)	V INCHES (mm)
	METERS	FEET								mm	INCHES		
2841P-1423	7.9	25'-11"	22.28 (566)	13.54 (344)	10.20 (259)	36.42 (925)	72.24 (1835)	21.50 (546)	3366 (1530)	≤200	≤7.87	37.40 (950)	22.63 (575)
2841P-2423	12.0	39'-4"	22.28 (566)	13.54 (344)	10.20 (259)	46.50 (1181)	82.32 (2091)	21.50 (546)	3795 (1725)	≤305	≤12.00	36.42 (925)	25.59 (650)
2841P-3423	19.2	63'-0"	18.94 (481)	23.70 (602)	12.48 (317)	57.36 (1457)	100.00 (2540)	21.50 (546)	4213 (1915)	≤406	≤15.98	34.64 (880)	35.03 (890)
2841P-5423	25.0	82'-0"	18.94 (481)	23.70 (602)	12.48 (317)	71.54 (1817)	114.17 (2900)	21.50 (546)	4521 (2055)	≤600	≤23.62	37.40 (950)	38.58 (980)