MUNCK

PRODUCT INFORMATION

2841 TWO RAIL TROLLEY

30 TON CAPACITY

DWG. NO: 2841D1826

DATE: 04.07.99

REVISION: 0

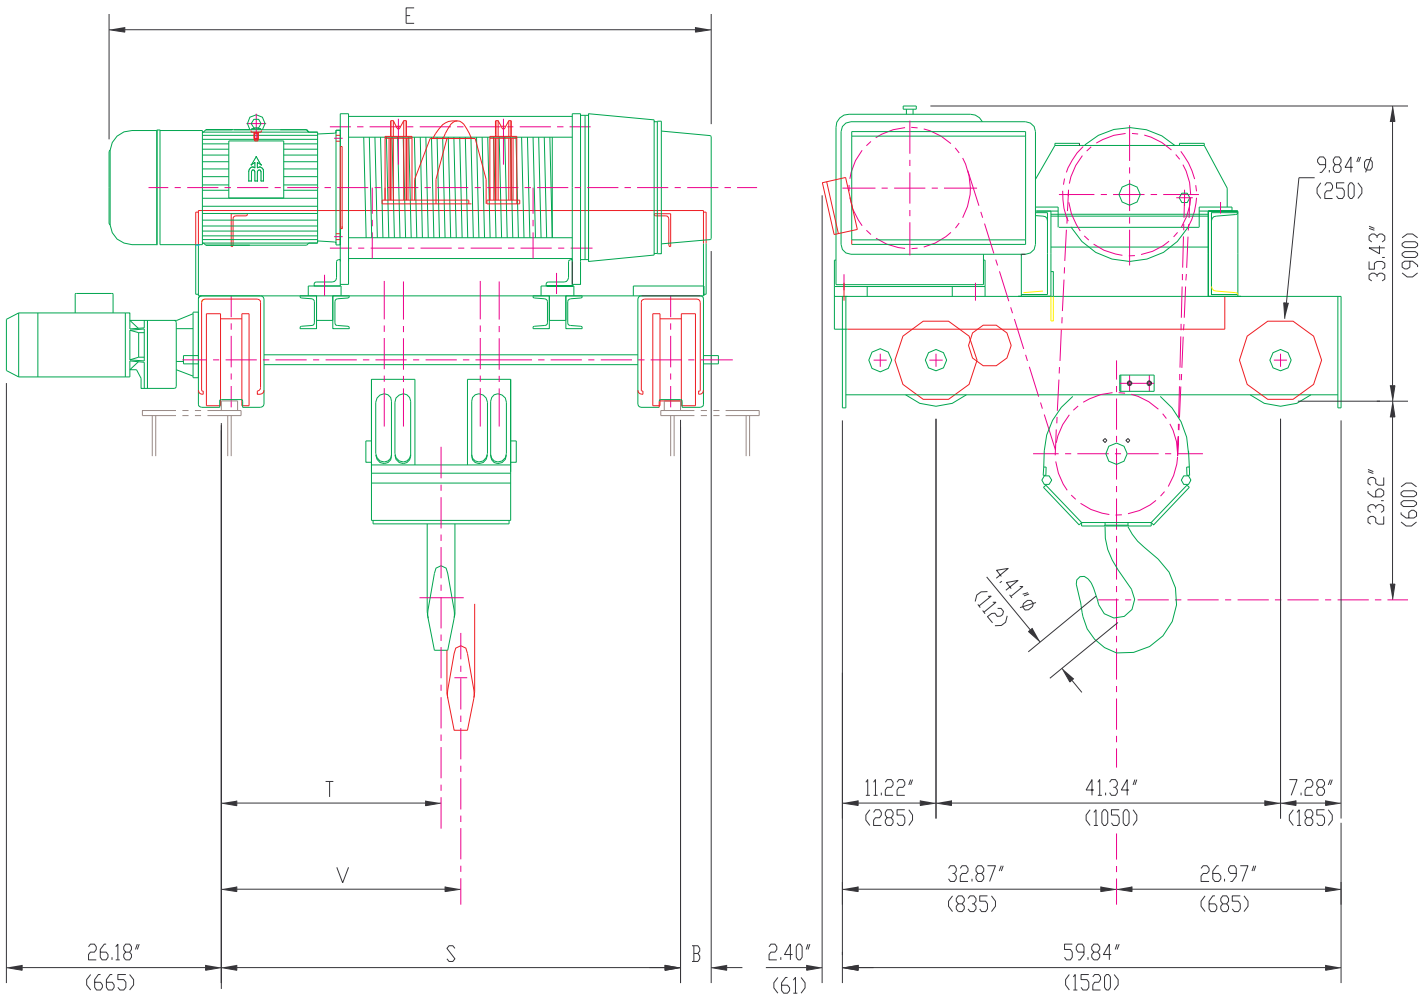

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	30 TONS (60000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	22.5/7.7 HP, 1800/600 RPM, TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	10 / 3.3 F.P.M (OPT. SPEEDS AVAILABLE)	TROLLEY CLASS:	CMAA C	TROLLEY MOTOR:	2.4/.6 HP, 1800/600 RPM, TEFC, S3 - 60%, CLASS "F" INSULATION
TROLLEY SPEED:	80 / 20 F.P.M (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V-3PH-60HZ		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	V	B	E	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
2841D-1826	3.9	12′-9″	55.11 (1400)	26.38 (670)	28.74 (730)	3.54 (90)	72.24 (1835)	4189 (1900)
2841D-2826	6.0	19′-8″	55.11 (1400)	27.36 (695)	30.98 (787)	14.61 (371)	82.32 (2091)	4299 (1950)
2841D-3826	9.6	31′-6″	82.68 (2100)	37.20 (945)	43.03 (1093)	14.57 (370)	100.00 (2540)	4850 (2200)
2841D-5826	12.5	41′-0″	110.24 (2800)	50.60 (1285)	58.23 (1479)	14.57 (370)	114.17 (2900)	5224 (2370)