MUNCK PRODUCT INFORMATION	3121 TWO RAIL TROLLEY	DWG. NO: 3121B-1226	
	3 3/4 TON CAPACITY	DATE: 08.11.00	REVISION: 0

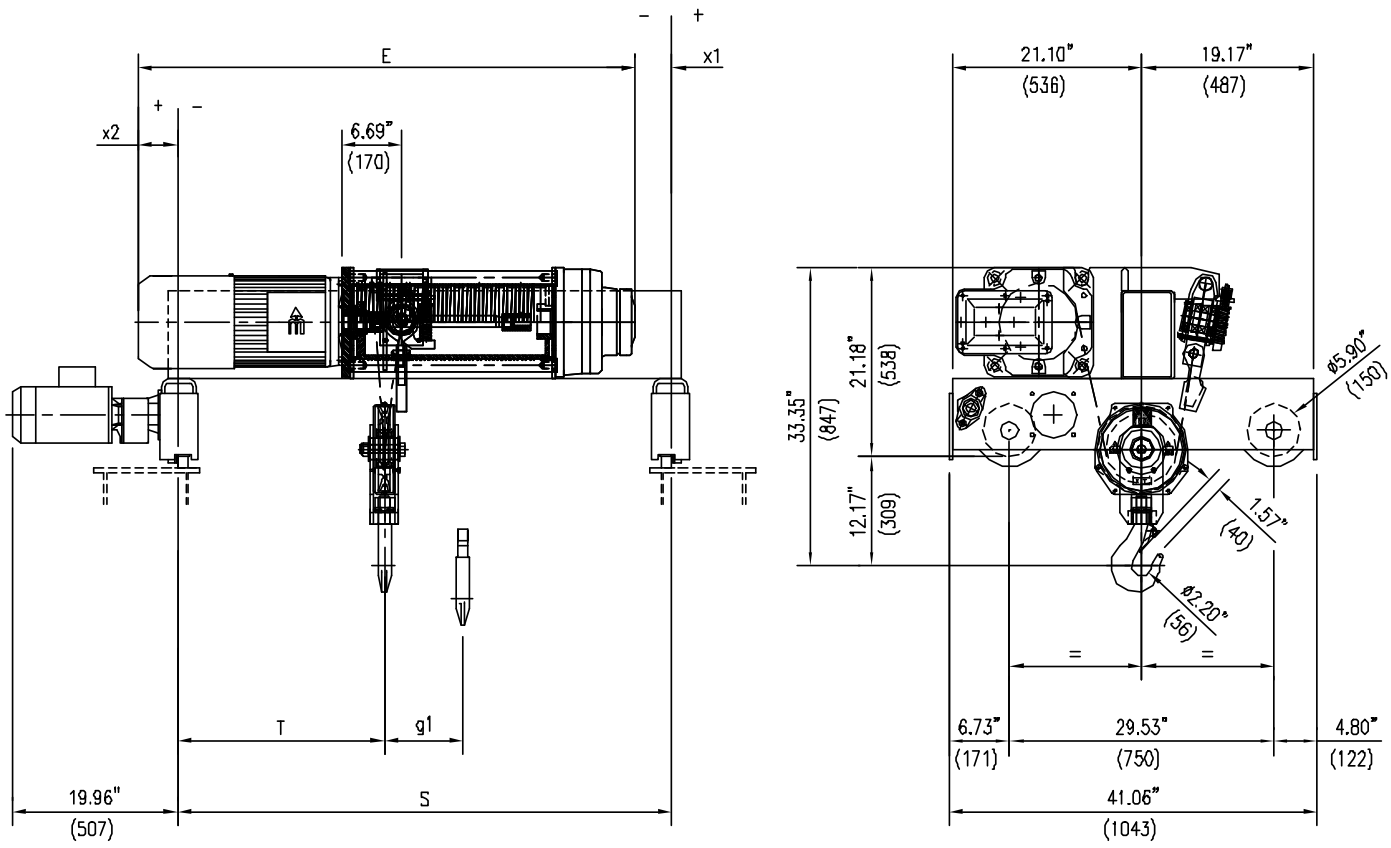

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	3 3/4 TONS (7500 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	9.8/2.8 HP, 1800/600 RPM, TEFC, S3 – 40%, CLASS "F" INSULATION
HOIST SPEED:	32 / 10 F.P.M (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V–3PH–60HZ		
TROLLEY SPEED:	67 / 16 F.P.M (OPT. SPEEDS AVAILABLE)	HOIST MOTOR:	6275–56	TROLLEY MOTOR:	.4/.1 HP, 3600/900 RPM, TEFC, S3 – 60%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1135R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	E	g1	x1	x2	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3121B–1226	13.1	43'–0"	55.11 (1400)	23.19 (589)	56.92 (1446)	8.74 (222)	–1.97 (–50)	3.78 (96)	1323 (600)
3121B–2226	17.8	58'–5"	55.11 (1400)	21.69 (551)	62.83 (1596)	11.69 (297)	2.56 (65)	5.16 (131)	1356 (615)
3121B–3226	24.4	80'–0"	55.11 (1400)	19.53 (496)	71.49 (1816)	16.02 (407)	11.02 (280)	5.35 (136)	1411 (640)
3121B–4226	33.4	109'–7"	82.68 (2100)	30.35 (771)	83.31 (2116)	21.93 (557)	–4.53 (–115)	5.16 (131)	1532 (695)