PRODUCT INFORMATION	3121 TWO RAIL TROLLEY 7 1/2 TON CAPACITY	DWG. NO: 3121B-1426 DATE: 08.11.00 REVISION: 0

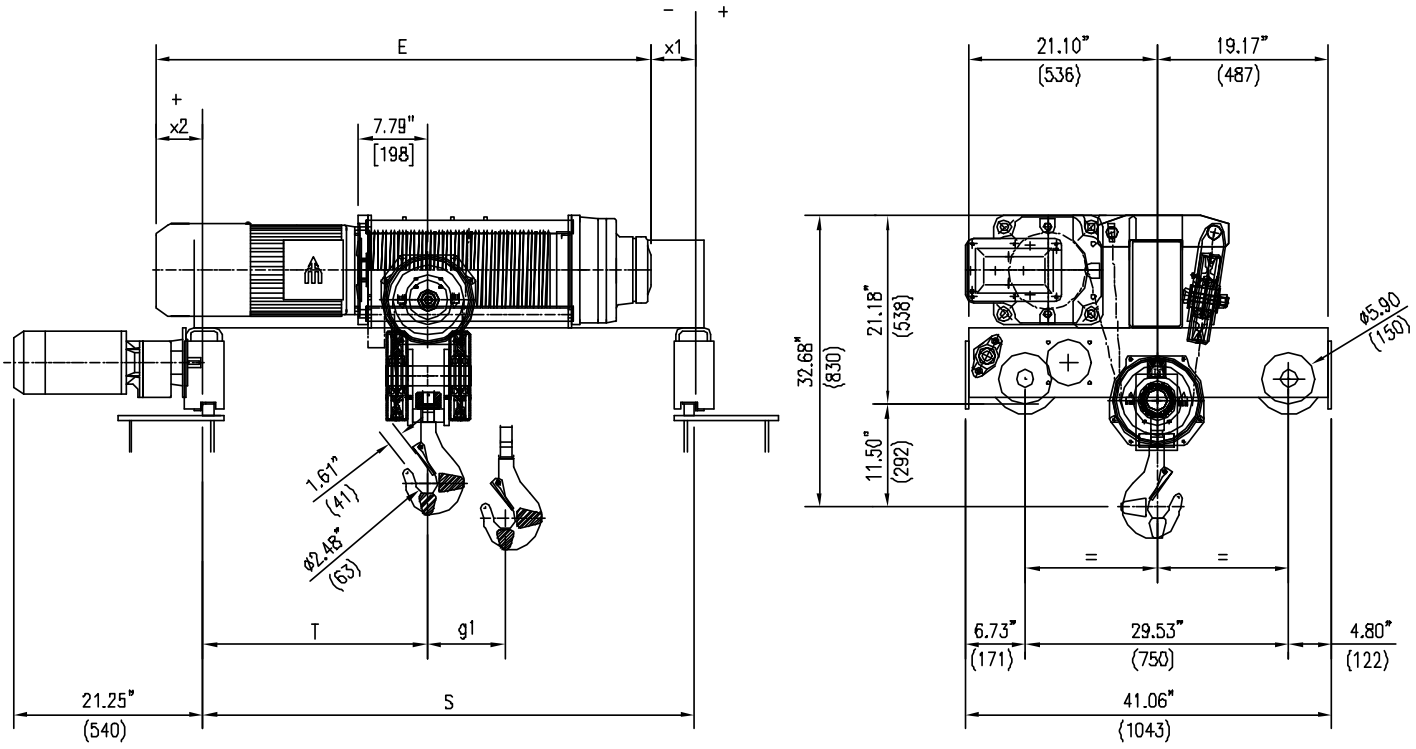

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	7 1/2 TONS (15000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	9.8/2.8 HP, 1800/600 RPM, TEFC, S3 – 50%, CLASS "F" INSULATION
HOIST SPEED:	16 / 5 F.P.M (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V–3PH–60HZ		
TROLLEY SPEED:	67 / 16 F.P.M (OPT. SPEEDS AVAILABLE)	HOIST MOTOR:	6275–56	TROLLEY MOTOR:	.9/.2 HP, 3600/900 RPM, TEFC, S3 – 60%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1145R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	E	g1	x1	x2	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3121B–1426	6.5	21'–3"	55.11 (1400)	25.35 (644)	56.92 (1446)	4.37 (111)	–1.18 (–30)	2.99 (76)	1378 (625)
3121B–2426	8.9	29'–2"	55.11 (1400)	24.61 (625)	62.83 (1596)	5.87 (149)	4.92 (125)	2.80 (71)	1411 (640)
3121B–3426	12.2	40'–0"	55.11 (1400)	23.54 (598)	71.49 (1816)	8.03 (204)	13.38 (340)	2.99 (76)	1466 (665)
3121B–4426	16.7	54'–9"	82.68 (2100)	35.83 (910)	83.31 (2116)	10.98 (279)	–1.97 (–50)	2.60 (66)	1588 (720)