MUNCK PRODUCT INFORMATION	3122 TWO RAIL TROLLEY	DWG. NO: 3122B-1426	
	10 TON CAPACITY	DATE: 08.11.00	REVISION: 0

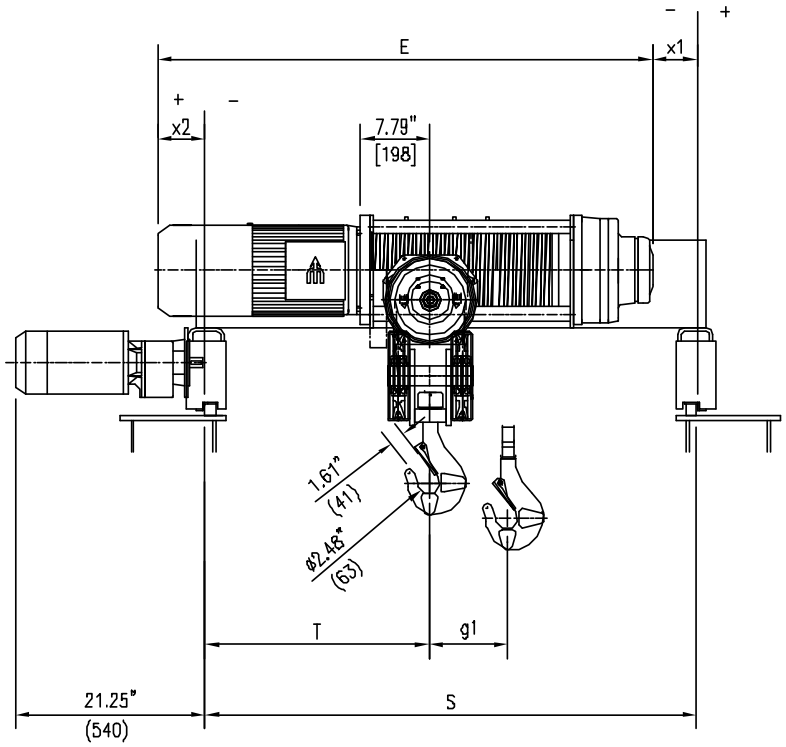

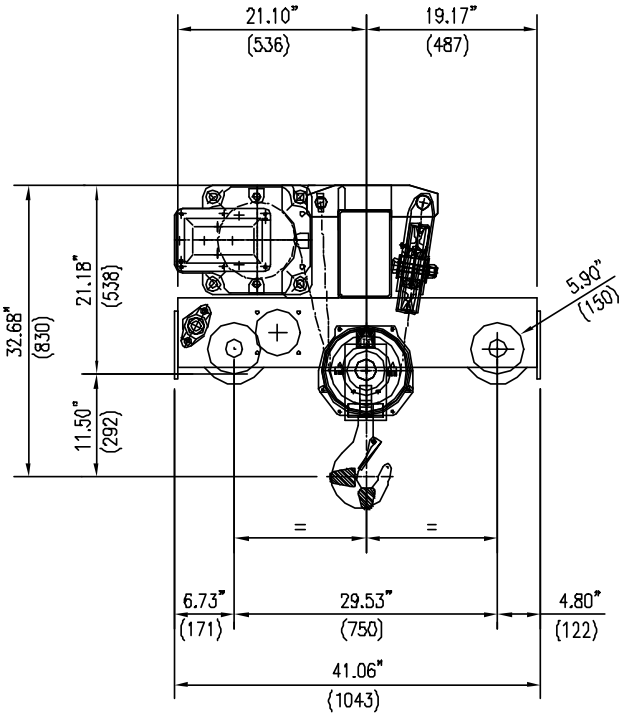

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	10 TONS (20000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	12/4 HP, 1800/600 RPM, TEFC, S3 – 40%, CLASS "F" INSULATION
HOIST SPEED:	16 / 5 F.P.M (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V–3PH–60HZ		
TROLLEY SPEED:	67 / 16 F.P.M (OPT. SPEEDS AVAILABLE)	HOIST MOTOR:	6275–58A	TROLLEY MOTOR:	.9/.2 HP, 3600/900 RPM, TEFC, S3 – 60%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1145R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	E	g1	x1	x2	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3122B–1426	6.5	21'–3"	55.11 (1400)	25.35 (644)	57.48 (1460)	4.37 (111)	–1.18 (–30)	3.54 (90)	1378 (625)
3122B–2426	8.9	29'–2"	55.11 (1400)	24.61 (625)	63.38 (1610)	5.87 (149)	4.92 (125)	3.35 (85)	1411 (640)
3122B–3426	12.2	40'–0"	55.11 (1400)	23.54 (598)	72.05 (1830)	8.03 (204)	13.38 (340)	8.90 (226)	1466 (665)
3122B–4426	16.7	54'–9"	82.68 (2100)	35.83 (910)	83.86 (2130)	10.98 (279)	–1.97 (–50)	3.15 (80)	1588 (720)