MUNCK PRODUCT INFORMATION	3131 TWO RAIL TROLLEY	DWG. NO: 3131B-1426	
	15 TON CAPACITY	DATE: 01.11.00	REVISION: 0

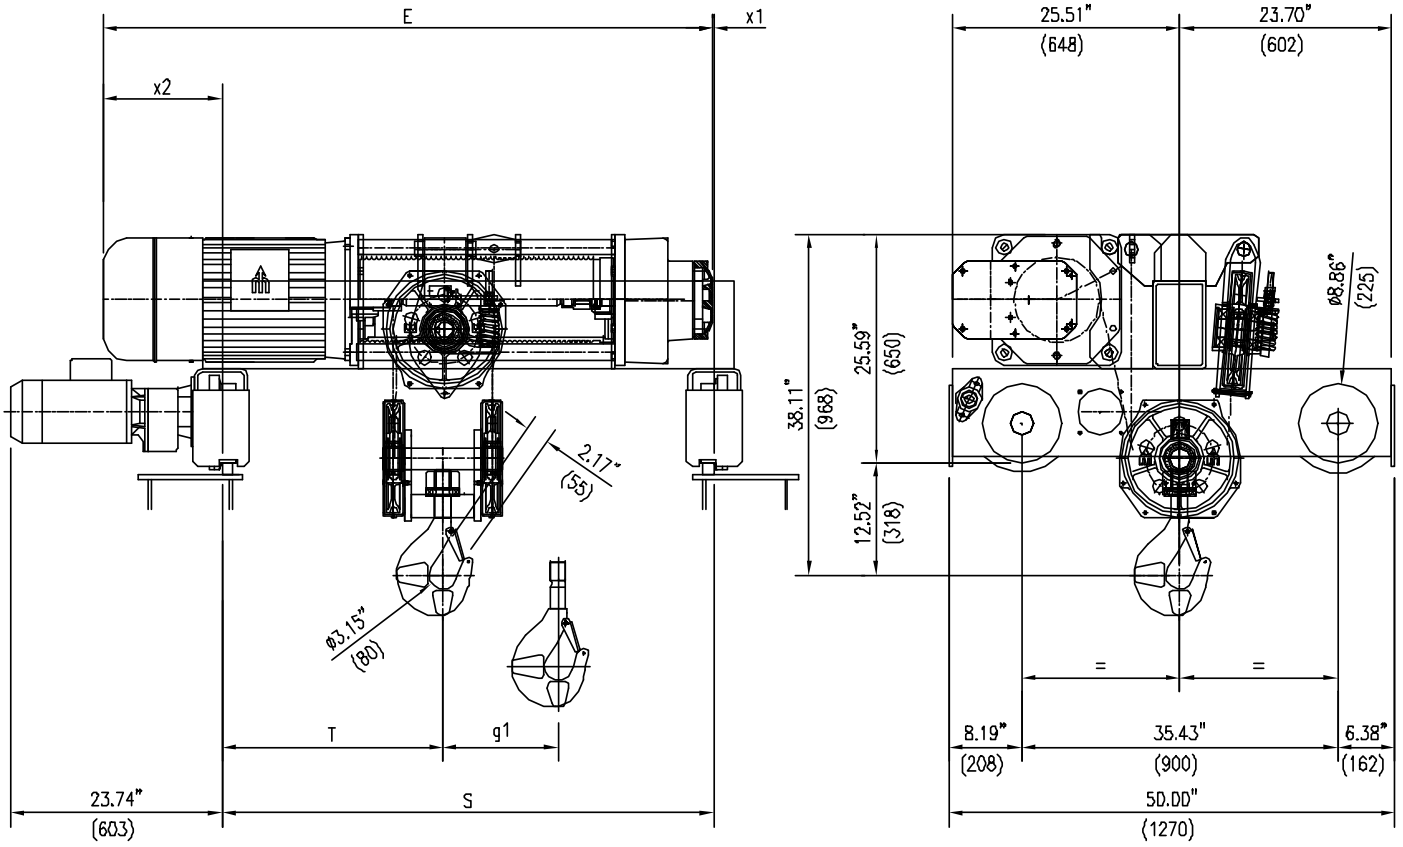

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	15 TONS (30000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	21.5/6.7 HP, 1800/600 RPM, TEFC, S3 – 30%, CLASS "F" INSULATION
HOIST SPEED:	17 / 6 F.P.M (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V–3PH–60HZ		
TROLLEY SPEED:	75 / 17 F.P.M (OPT. SPEEDS AVAILABLE)	HOIST MOTOR:	6275–62A	TROLLEY MOTOR:	1.2/.3 HP, 3600/900 RPM, TEFC, S3 – 60%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1355R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	E	g1	x1	x2	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3131B–1426	8.0	26'–3"	55.11 (1400)	24.72 (628)	69.05 (1754)	5.71 (145)	0 (0)	13.94 (354)	3087 (1400)
3131B–2426	11.0	36'–1"	55.11 (1400)	23.62 (600)	77.72 (1974)	7.87 (200)	4.72 (120)	17.87 (454)	3197 (1450)
3131B–3426	15.1	49'–6"	82.68 (2100)	35.91 (912)	89.53 (2274)	10.83 (275)	–1.38 (–35)	8.23 (209)	3616 (1640)
3131B–4426	21.3	69'–10"	82.68 (2100)	33.70 (856)	107.24 (2724)	15.24 (387)	11.02 (280)	13.54 (344)	3759 (1705)