MUNCK PRODUCT INFORMATION	3131 TWO RAIL TROLLEY 20 TON CAPACITY	DWG. NO: 3131B-1626 DATE: 01.11.00	REVISION: 0

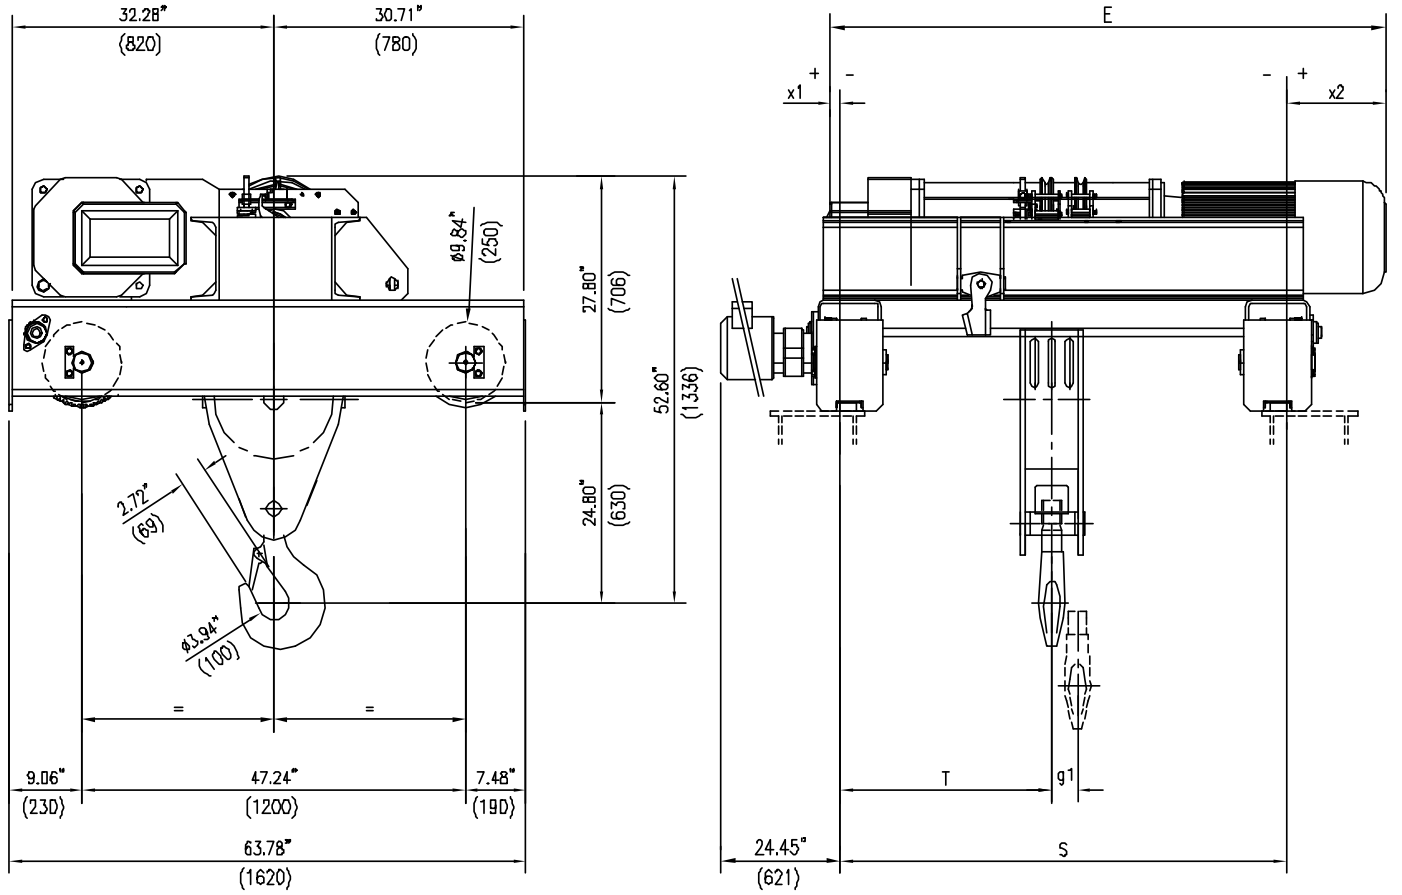

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	20 TONS (40000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	21.5/6.7 HP, 1800/600 RPM, TEFC, S3 – 30%, CLASS "F" INSULATION
HOIST SPEED:	11 / 4 F.P.M (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V–3PH–60HZ		
TROLLEY SPEED:	83 / 20 F.P.M (OPT. SPEEDS AVAILABLE)	HOIST MOTOR:	6275–62A	TROLLEY MOTOR:	2.4/.6 HP, 3600/900 RPM, TEFC, S3 – 60%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1575R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	E	g1	x1	x2	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3131B–1626	5.3	17'–4"	55.11 (1400)	25.63 (651)	69.05 (1754)	3.82 (97)	7.28 (185)	2.24 (57)	3881 (1760)
3131B–2626	7.3	23'–11"	55.11 (1400)	24.92 (633)	77.72 (1974)	5.28 (134)	15.75 (400)	6.85 (174)	3991 (1810)
3131B–3626	10.0	32'–9"	82.68 (2100)	37.72 (958)	89.53 (2274)	7.20 (183)	11.81 (300)	-4.96 (-126)	4432 (2010)
3131B–4626	14.2	46'–7"	82.68 (2100)	36.26 (921)	107.24 (2724)	10.16 (258)	27.56 (700)	-2.99 (-76)	4575 (2075)