MUNCK PRODUCT INFORMATION	3131 TWO RAIL TROLLEY	DWG. NO: 3131B-1826	
	30 TON CAPACITY	DATE: 01.11.00	REVISION: 0

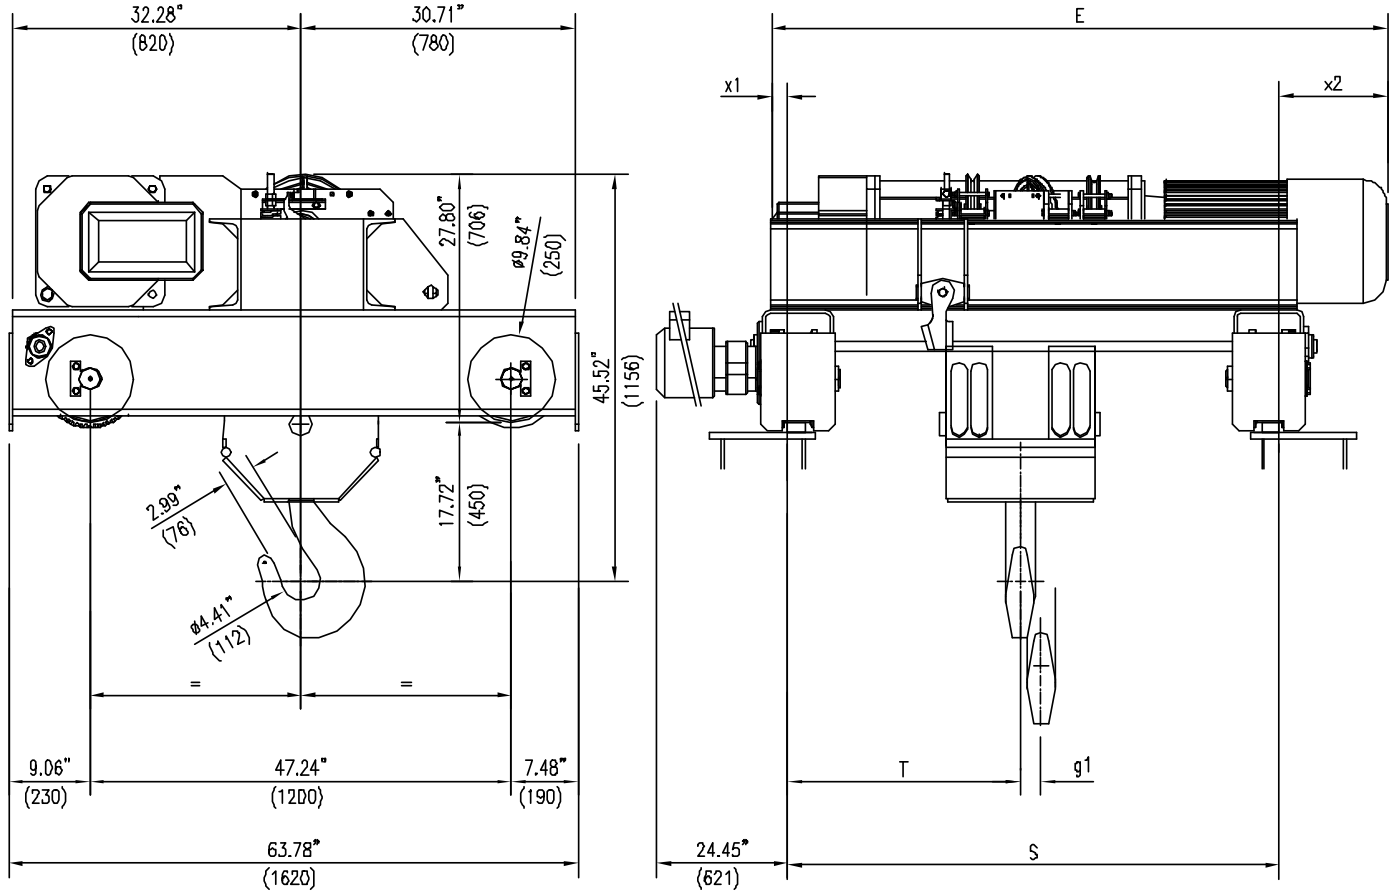

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	30 TONS (60000 LBS)	HOIST CLASS:	HMI H4	HOIST MOTOR:	21.5/6.7 HP, 1800/600 RPM, TEFC, S3 – 30%, CLASS "F" INSULATION
HOIST SPEED:	9 / 3 F.P.M (OPT. SPEEDS AVAILABLE)	POWER SUPPLY:	460V–3PH–60HZ		
TROLLEY SPEED:	83 / 20 F.P.M (OPT. SPEEDS AVAILABLE)	HOIST MOTOR:	6275–62A	TROLLEY MOTOR:	2.4/.6 HP, 3600/900 RPM, TEFC, S3 – 60%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1575R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	E	g1	x1	x2	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3131B–1826	4.0	13'–1"	55.11 (1400)	26.14 (664)	69.05 (1754)	2.83 (72)	9.05 (230)	.47 (12)	4156 (1885)
3131B–2826	5.5	18'–0"	55.11 (1400)	23.62 (600)	77.72 (1974)	3.94 (100)	15.75 (400)	2.44 (62)	4267 (1935)
3131B–3826	7.6	24'–11"	82.68 (2100)	38.62 (981)	89.53 (2274)	5.39 (137)	2.75 (70)	–.31 (–8)	4818 (2185)
3131B–4826	10.6	34'–9"	82.68 (2100)	37.52 (953)	107.24 (2724)	7.60 (193)	18.90 (480)	1.25 (32)	5193 (2355)