MUNCK PRODUCT INFORMATION	3151 TWO RAIL TROLLEY	DWG. NO: 3151A-1426	
	25 TON CAPACITY	DATE: 01/29/01	REVISION: 0

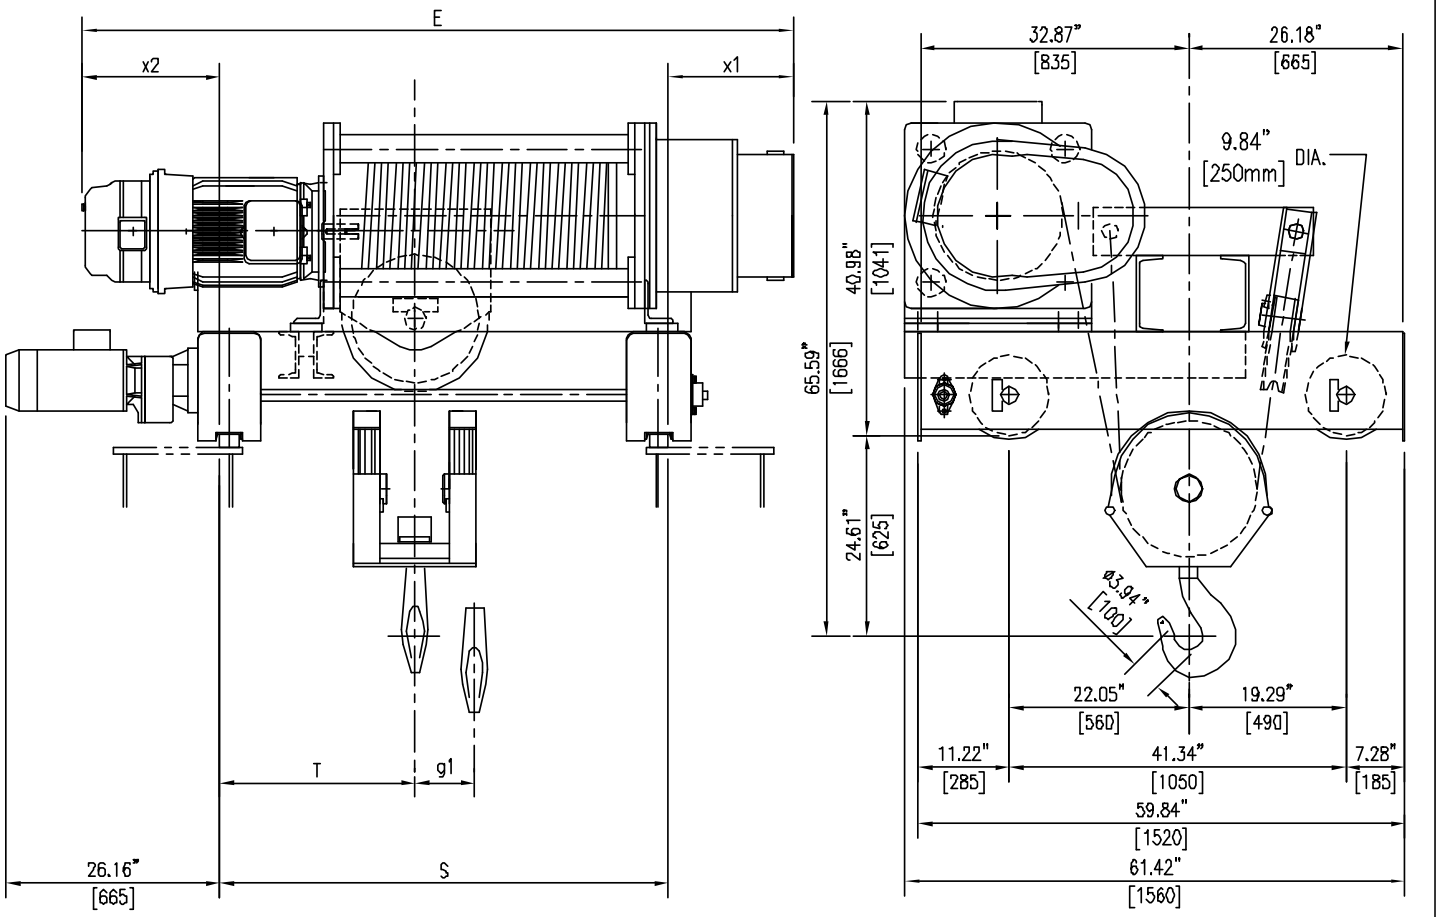

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	25 TONS [50,000 LBS]	HOIST CLASS:	HMI H4	HOIST MOTOR:	26.8/8.4 HP AT 1800/600 RPM TEFC, S3 – 40%, CLASS "F" INSULATION
HOIST SPEED:	13/4 FPM	POWER SUPPLY:	460–3PH–60HZ		
TROLLEY SPEED:	83/20 FPM	HOIST MOTOR:	6275–67	TROLLEY MOTOR:	2.4/.6 HP AT 3260/780 RPM TEFC, S3 – 40%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1575R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	g1	x1	x2	E	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3151A–1426	10	33	55.11 (1400)	24.01 (610)	7.28 (185)	–	–	87.32 (2218)	4697 (2135)
3151A–2426	15	49	82.67 (2100)	36.02 (915)	10.83 (275)	–	–	101.1 (2568)	5082 (2310)
3151A–3426	–	–	–	–	–	–	–	–	–
3151A–4426	20	65.61	110.24 (2800)	49.21 (1250)	14.17 (360)	–	–	114.88 (2918)	5687 (2585)
3151A–5426	22.5	73.82	110.24 (2800)	45.27 (1150)	16.14 (410)	–	–	122.76 (3118)	5797 (2635)
3151A–6426	26.75	87.76	125.98 (3200)	49.21 (1250)	19.09 (485)	–	–	134.56 (3418)	6072 (2760)
3151A–7426	–	–	–	–	–	–	–	–	–
3151A–8426	–	–	–	–	–	–	–	–	–
3151A–9426	–	–	–	–	–	–	–	–	–