MUNCK PRODUCT INFORMATION	3161 TWO RAIL TROLLEY	DWG. NO: 3161B-1426	
	30 TON CAPACITY	DATE: 02/01/02	REVISION: 0

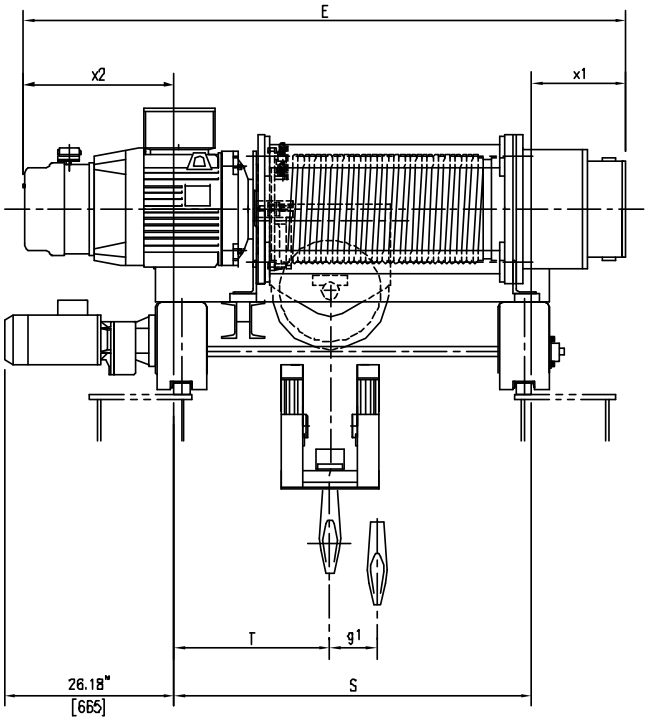

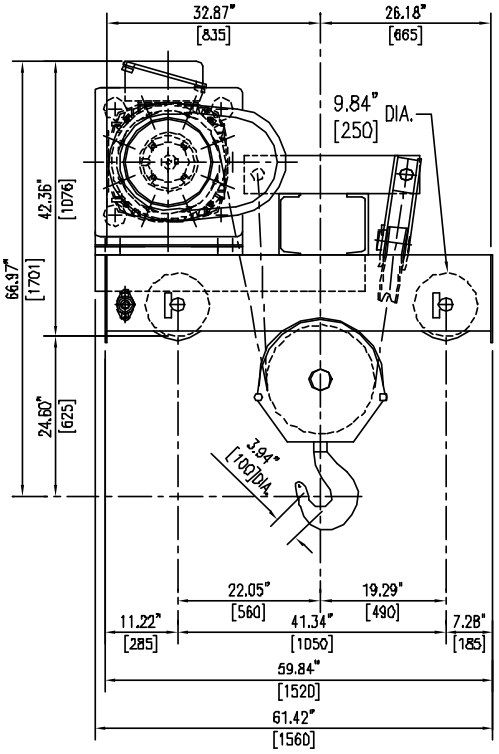

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	30 TONS [60000 LBS]	HOIST CLASS:	HMI H4	HOIST MOTOR:	50/8 HP AT 1800/300 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	20/4 FPM	POWER SUPPLY:	460-3PH-60HZ		
TROLLEY SPEED:	83/20 FPM	HOIST MOTOR:	6275-69	TROLLEY MOTOR:	2.4/.6 HP AT 3260/780 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100-1575R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	g1	x1	x2	E	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3161B-1426	10	32.8	55.11 (1400)	24.01 (610)	7.28 (185)	–	–	93.70 (2380)	5368 (2435)
3161B-2426	15	49.21	82.67 (2100)	36.02 (915)	10.82 (275)	–	–	115.75 (2940)	5754 (2610)
3161B-3426	–	–	–	–	–	–	–	–	–
3161B-4426	20	65.62	110.23 (2800)	49.21 (1250)	14.17 (360)	–	–	129.92 (3300)	6360 (2885)
3161B-5426	22.5	73.82	110.23 (2800)	45.27 (1150)	16.14 (410)	–	–	137.40 (3490)	6470 (2935)
3161B-6426	26.75	87.76	125.98 (3200)	49.21 (1250)	19.09 (485)	–	–	149.20 (3790)	6746 (3060)
3161B-7426	–	–	–	–	–	–	–	–	–
3161B-8426	–	–	–	–	–	–	–	–	–
3161B-9426	–	–	–	–	–	–	–	–	–