MUNCK PRODUCT INFORMATION	3171 TWO RAIL TROLLEY	DWG. NO: 3171G-1626	
	50 TON CAPACITY	DATE: 02/01/02	REVISION: 0

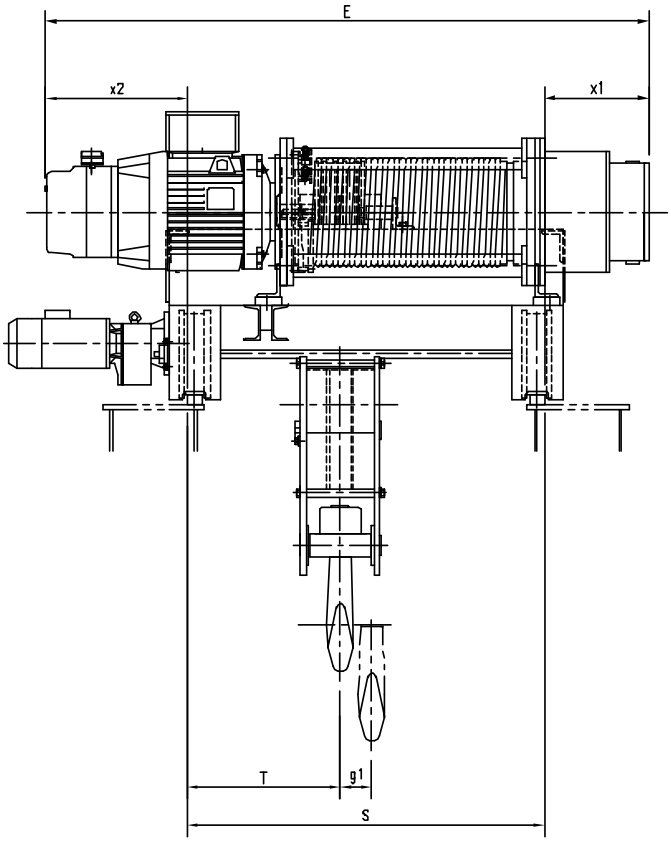

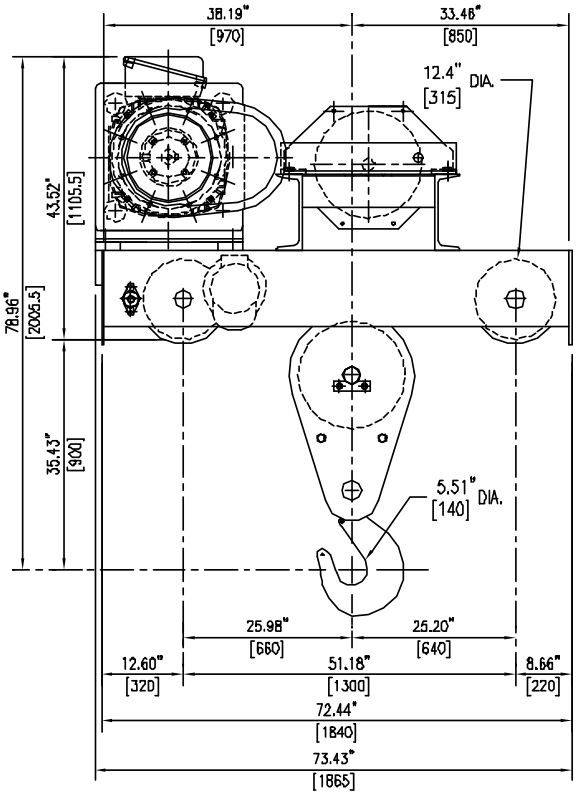

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	50 TONS [100,000 LBS]	HOIST CLASS:	HMI H4	HOIST MOTOR:	50/8 HP AT 1800/300 RPM TEFC, S3 – 40%, CLASS "F" INSULATION
HOIST SPEED:	11/1.7 FPM	POWER SUPPLY:	460–3PH–60HZ		
TROLLEY SPEED:	86/20 FPM	HOIST MOTOR:	6275–69	TROLLEY MOTOR:	3/.88 HP AT 3260/780 RPM TEFC, S3 – 40%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100–1785R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	g1	x1	x2	E	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3171G–1626	6.65	21'–10"	55.11 (1400)	23.62 (600)	4.84 (123)	–	–	93.7 (2380)	6029 (2735)
3171G–2626	10	32'–10"	82.67 (2100)	37.40 (950)	7.16 (182)	–	–	115.75 (2940)	6580 (2985)
3171G–3626	–	–	–	–	–	–	–	–	–
3171G–4626	13.3	43'–8"	110.23 (2800)	50.59 (1285)	9.44 (240)	–	–	129.9 (3300)	7242 (3285)
3171G–5626	15	49'–2"	110.23 (2800)	43.30 (1100)	10.75 (273)	–	–	137.4 (3490)	7352 (3335)
3171G–6626	17.8	58'–5"	125.98 (3200)	47.24 (1200)	12.72 (323)	–	–	149.2 (3790)	7848 (3560)
3171G–7626	–	–	–	–	–	–	–	–	–
3171G–8626	–	–	–	–	–	–	–	–	–
3171G–9626	–	–	–	–	–	–	–	–	–