MUNCK PRODUCT INFORMATION	3161 TWO RAIL TROLLEY	DWG. NO: 3161B-1626	
	45 TON CAPACITY	DATE: 02/01/02	REVISION: 0

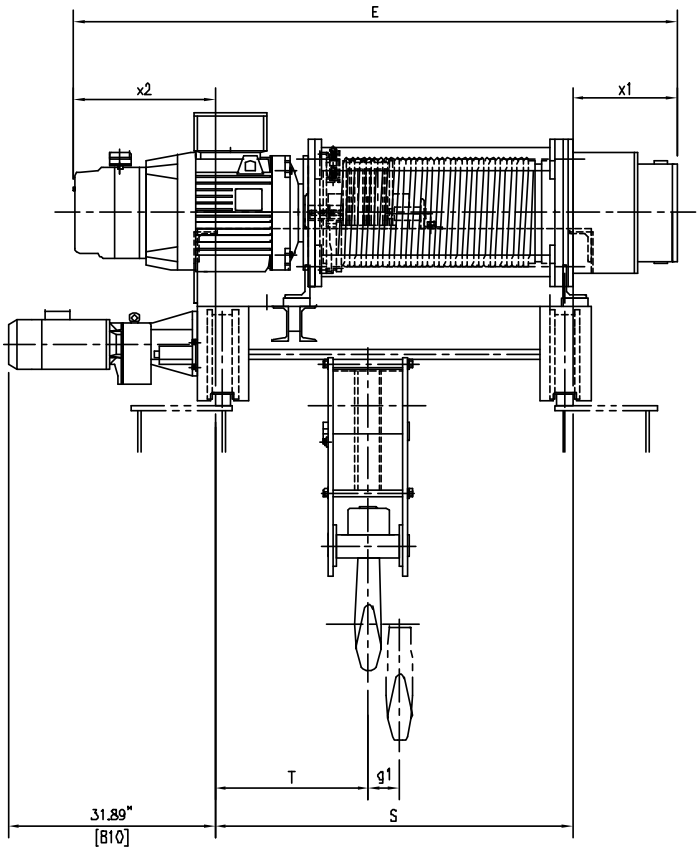

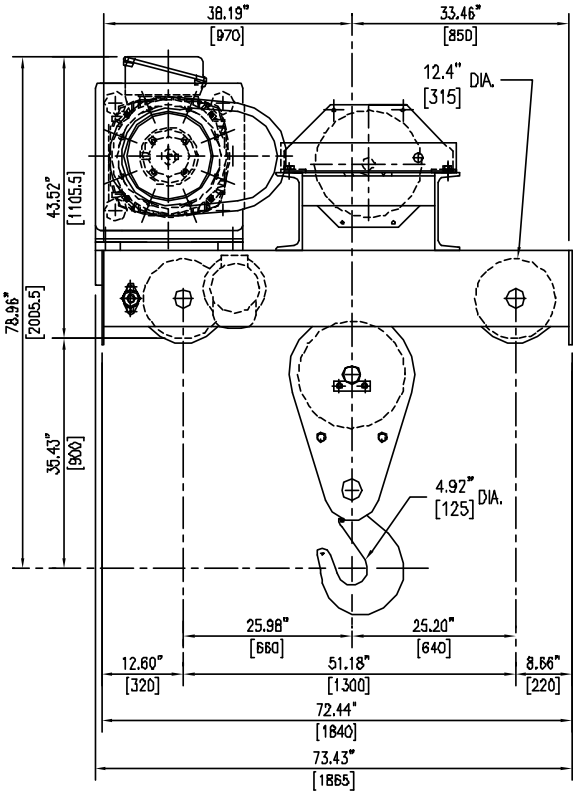

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	45 TONS [90000 LBS]	HOIST CLASS:	HMI H4	HOIST MOTOR:	50/8 HP AT 1800/300 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	13/2.3 FPM	POWER SUPPLY:	460-3PH-60HZ		
TROLLEY SPEED:	86/20 FPM	HOIST MOTOR:	6275-69	TROLLEY MOTOR:	3/.88 HP AT 3250/730 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
		TROLLEY MOTOR:	9100-1785R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	g1	x1	x2	E	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3161B-1626	6.65	21.81	55.11 (1400)	23.62 (600)	4.84 (123)	–	–	93.70 (2380)	6017 (2735)
3161B-2626	10	32.80	82.67 (2100)	37.40 (950)	7.16 (182)	–	–	115.75 (2940)	6567 (2985)
3161B-3626	–	–	–	–	–	–	–	–	–
3161B-4626	13.3	43.64	110.23 (2800)	50.59 (1285)	9.44 (240)	–	–	129.92 (3300)	7227 (3285)
3161B-5626	15	49.21	110.23 (2800)	43.30 (1100)	10.75 (273)	–	–	137.40 (3490)	7337 (3335)
3161B-6626	17.8	58.40	125.98 (3200)	47.24 (1200)	12.72 (323)	–	–	149.21 (3790)	7832 (3560)
3161B-7626	–	–	–	–	–	–	–	–	–
3161B-8626	–	–	–	–	–	–	–	–	–
3161B-9626	–	–	–	–	–	–	–	–	–