MUNCK PRODUCT INFORMATION	3161 TWO RAIL TROLLEY	DWG. NO: 3161B-1826	
	60 TON CAPACITY	DATE: 02/01/02	REVISION: 0

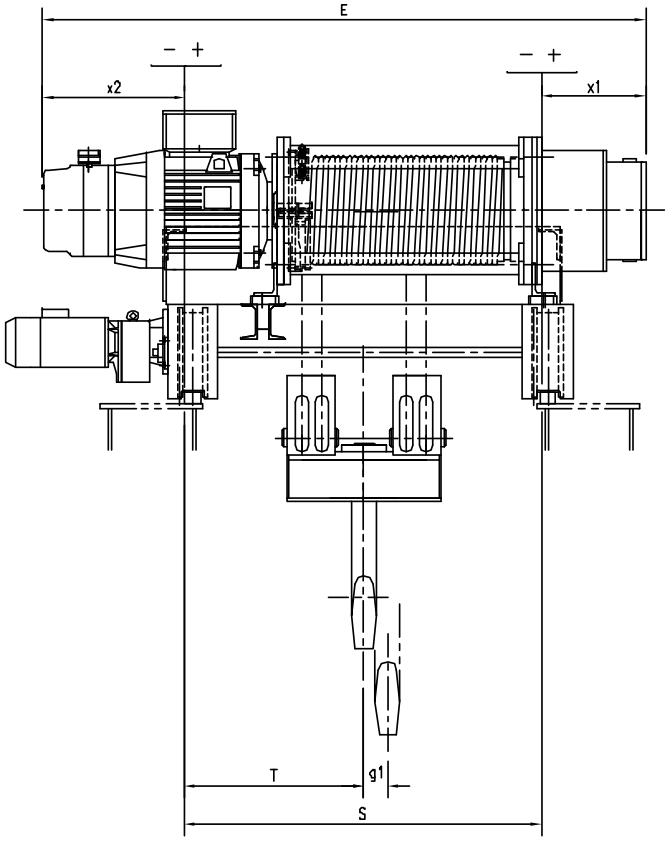

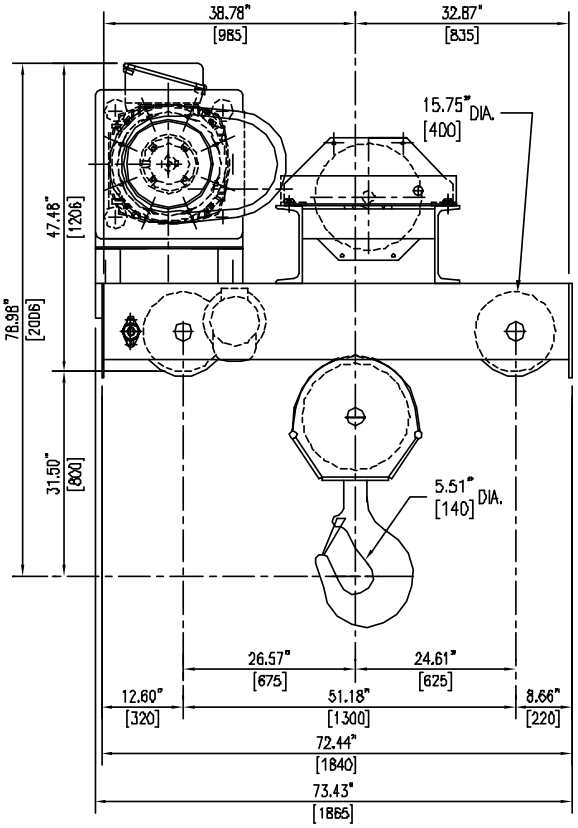

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	60 TONS [120,000 LBS]	HOIST CLASS:	HMI H4	HOIST MOTOR:	50/8 HP AT 1800/300 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	10/1.7 FPM	POWER SUPPLY:	460-3PH-60HZ		
TROLLEY SPEED:	84/19 FPM	HOIST MOTOR:	6275-69	TROLLEY MOTOR:	3/.88 HP AT 3250/730 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
		TROLLEY MOTOR:	(2) 9100-1785R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	g1	x1	x2	E	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3161B-1426	5	16.4	55.11 (1400)	27.75 (705)	3.62 (92)	–	–	93.70 (2380)	6457 (2935)
3161B-2426	7.5	24.6	82.67 (2100)	39.76 (1010)	5.35 (136)	–	–	115.75 (2940)	7007 (3185)
3161B-3426	–	–	–	–	–	–	–	–	–
3161B-4426	10	32.8	110.23 (2800)	53.54 (1360)	7.09 (180)	–	–	129.92 (3300)	7777 (3535)
3161B-5426	11.25	36.9	110.23 (2800)	49.61 (1260)	8.07 (205)	–	–	137.40 (3490)	7887 (3585)
3161B-6426	13.35	43.8	125.98 (3200)	53.54 (1360)	9.53 (242)	–	–	149.21 (3790)	8437 (3835)
3161B-7426	–	–	–	–	–	–	–	–	–
3161B-8426	–	–	–	–	–	–	–	–	–
3161B-9426	–	–	–	–	–	–	–	–	–