MUNCK PRODUCT INFORMATION	3171 TWO RAIL TROLLEY	DWG. NO: 3171G-1826	
	65 TON CAPACITY	DATE: 02/01/02	REVISION: 0

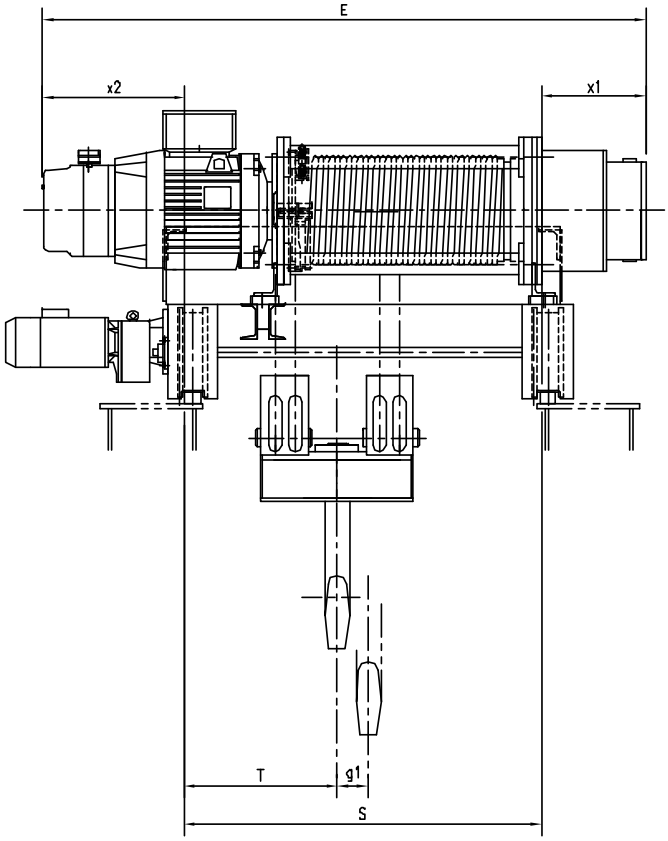

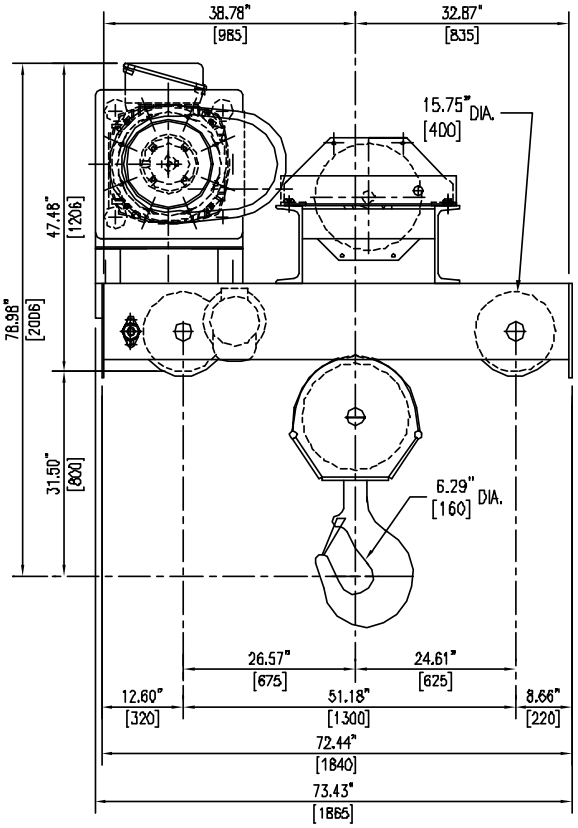

MUNCK RESERVES THE RIGHT TO MAKE CHANGE WITHOUT NOTICE.

HOIST TECHNICAL DATA

CAPACITY:	65 TONS [130,000 LBS.]	HOIST CLASS:	HMI H4	HOIST MOTOR:	50/8 HP AT 1800/300 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
HOIST SPEED:	8/1.4 FPM	POWER SUPPLY:	460-3PH-60HZ		
TROLLEY SPEED:	84/19 FPM	HOIST MOTOR:	6275-69	HOIST MOTOR:	3/.88 HP AT 3260/780 RPM TEFC, S3 - 40%, CLASS "F" INSULATION
		TROLLEY MOTOR:	(2) 9100-1785R08G		

DIMENSIONAL INFORMATION

HOIST TYPE	HEIGHT OF LIFT		S	T	g1	x1	x2	E	WEIGHT
	METERS	FEET	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	INCHES (mm)	LBS (KG)
3171G-1826	5	16'-5"	55.11 (1400)	23.62 (600)	4.84 (123)	–	–	93.7 (2380)	6470 (2935)
3171G-2826	7.5	24'-7"	82.67 (2100)	37.40 (950)	7.16 (182)	–	–	115.75 (2940)	7021 (3185)
3171G-3826	–	–	–	–	–	–	–	–	–
3171G-4826	10	32'-10"	110.23 (2800)	50.59 (1285)	9.45 (240)	–	–	129.92 (3300)	7793 (3535)
3171G-5826	11.25	36'-11"	110.23 (2800)	43.31 (1100)	10.75 (273)	–	–	137.4 (3490)	7903 (3585)
3171G-6826	13.35	43'-9"	125.98 (3200)	47.24 (1200)	12.72 (323)	–	–	149.21 (3790)	8454 (3835)
3171G-7826	–	–	–	–	–	–	–	–	–
3171G-8826	–	–	–	–	–	–	–	–	–
3171G-9826	–	–	–	–	–	–	–	–	–